


Dell 407-BBOR Datasheet

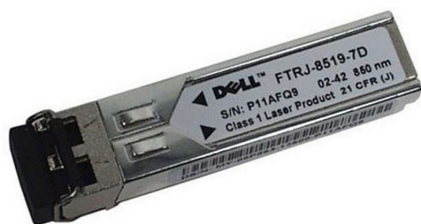

Dell 407-BBOR Networking, Transceiver, SFP, 1000BASE-SX connector

407-BBOR

The Dell™ SFP transceiver delivers fiber connectivity to extend the range of your network. This hot-pluggable transceiver with SFP (Small Form Factor Pluggable) footprint features a Duplex LC connector. The Dell networking 1000BASE SFP transceiver provides 1000BASE connectivity up to 500 m .

Additionally, it provides a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power, and transceiver supply voltage.

Specifications

- Manufacturer Part: 63GGJ
- Dell Part: 407-BBOR
- Order Code: 407-Bbor
- Device Type: SFP (mini-GBIC) transceiver module
- Form Factor: Plug-in module
- Connectivity Technology: Wired
- Cabling Type: 1000Base-SX

- Data Link Protocol: GigE
- Data Transfer Rate: 1 Gbps
- Optical Wave Length: 850 nm
- Max Transfer Distance: 1800 ft
- Interfaces: 1 x Ethernet 1000Base-SX

Compatibility

Designed For

- Dell Force10 MXL blade, S4810 High-Performance, S4820T, S50 High Performance Data Center Switch, S55, S60, Z9000, Z9500
- Dell Force10 ExaScale E-Series E1200i, E600i
- Dell Networking C1048P, C7004, C7008, C9010, N2024, N2024P, N2048, N2048P, N3024, N3024F, N3024P, N3048, N3048P, N4032, N4032F, N4064, N4064F, S3048-ON, S4810-ON, S5000, S6000, S6000-ON, S6010-ON, X1008, X1008P, X1018, X1018P, X4012
- Dell PowerConnect 2824, 2848, 3524, 3524P, 3548, 3548P, 5524, 5524P, 5548, 5548P, 6224, 6224F, 6224P, 6248, 6248P, 7024, 7024F, 7024P, 7048, 7048P, 7048R, 7048RA, 8024F, M8024, M8024-k
- Dell PowerEdge FX2, VRTX, VRTX M520, VRTX M620
- Dell EMC Networking N3132PX-ON, S4048-ON, X1026, X1026P, X1052, X1052P

[Buy Now](#)