


Broadcom 9311-8i Datasheet

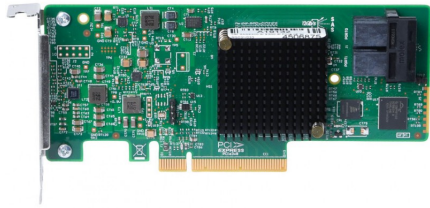

Broadcom LSI 9311-8i SAS3008-8I PCIe 3.0 x8 SAS3008 Fusion-MPT 8 Internal Ports 12Gb/s SAS Host Bus Adapter

9311-8i

The LSI SAS 9311-8i PCI Express (PCIe)-to-Serial Attached SCSI (SAS) host bus adapter (HBA), referred to as the LSI 12Gb/s SAS HBA, provides high-performance internal storage connectivity for servers and workstations. The LSI 12Gb/s SAS HBA provides eight lanes of 12Gb/s SAS connectivity and is matched with eight lanes of PCIe 3.0 8Gb/s performance. The low-profile design of the SAS HBA includes a full-height bracket and low-profile mounting bracket that create a universal fit for any server. The LSI 12Gb/s SAS HBA is based on the Fusion-MPT™-architected LSI SAS 3008 controller that integrates the latest enhancements in PCIe 3.0 technology and 12Gb/s SAS technology.

The LSI 12Gb/s SAS HBA has onboard Flash memory for the firmware, and BIOS and NVSRAM for RAID support (RAID 0, RAID 1, RAID 10, and RAID 1E).

Features

- Implements LSI SAS 3008 eight-port 12Gb/s SAS to PCIe 3.0 controller
- Supports eight-lane, full-duplex PCIe 3.0 performance
- Supports eight internal 12Gb/s SATA+SAS ports
- Supports SATA link rates of 3Gb/s and 6Gb/s
- Supports SAS link rates of 3Gb/s, 6Gb/s, and 12Gb/s

- Provides two x4 internal mini-SAS HD connectors (SFF-8643)
- Supports passive copper cable, active copper cable, and optical cable
- Supports Integrated RAID (RAID 0, RAID 1, RAID 10, and RAID 1E)
- Supports up to 1024 SATA or SAS end devices
- Offered with a full-height bracket and a low-profile vented bracket
- Provides one heartbeat LED

Specifications

- Product: SAS 9311-8i Host Bus Adapter
- I/O Controller: SAS 3008 Fusion MPT 2.5
- Port Count: 8 port internal
- Connectors: Mini SAS HD SFF8643 Two (x4)
- Storage Connectivity Data Transfer Rates: 12Gb/s SAS 3.0 Compliant
- SAS Bandwidth: Half Duplex (x8 wide bus) 9600 MB/s
- Port Configurations
 - 8 ea, x1 ports (individual drives)
 - 2 ea, x4 wide port
- Host Bus: x8 lane, PCIe 3.0
- PCI Data Burst Transfer Rates: Half Duplex x8, PCIe 3.0, 8000 MB/s
- Form Factor: Low Profile
- Physical Dimensions: 2.6" x 6.0"
- Brackets: Full Height and low profile vented
- Cable Support: Passive Copper
- LED Management: Reference SFF-8485 (SGPIO) compliant
- Operating Voltage: +12V +/-8%; 3.3V +/-9%
- PCI Power (Nominal): 13W
- Environmental
 - Operating: 0°C to 55°C
 - Storage: -45°C to 105°C
 - 5 to 90% Non-condensing
 - Airflow: 200 LFM
- MTBF: >2,800,000 hours
- Regulatory Certifications: EMC: Class B-US (CFR 47, P15B); Canada (ICES-003); Japan (V-3/02.04); Europe (EN55022/EN55024); Australia/New Zealand (AS/NZS 3548); Korea (N-B 2-0001-404); Safety: EN60950; RoHS;

WEEE

- OS Support: Microsoft Windows, Linux (SuSE , Red Hat), Solaris, VMware, FreeBSD See <http://www.lsi.com/support/pages/download-search.aspx> for details on versions * The HBA supports Solaris 10 and Oracle® provides a built in driver; installation of an LSI driver is not required.

For more information of this Broadcom SAS 9311-8i, please visit Broadcom website:

<https://docs.broadcom.com/doc/12354879>

[Buy Now](#)