


# Broadcom 9500-8i Datasheet

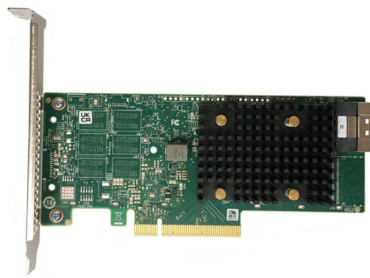

Broadcom LSI 9500-8i 05-50134-01 PCIe 4.0 x8 SAS3808 8 Internal Ports 12Gb/s SAS, 6Gb/s SATA, Gen 4.0 PCIe(NVMe) Tri-Mode HBA

9500-8i

The 9500-8i Tri-Mode, PCIe Gen 4.0 HBA with eight internal ports is ideal for increased connectivity and maximum performance for enterprise data center flexibility.

With increased bandwidth and IOPS performance compared to previous generations, the 9500-8i adapter delivers the performance and scalability needed by critical applications.

- Connects up to 1024 SAS/SATA devices or 32 NVMe devices
- Provides maximum connectivity and performance for high-end servers and applications
- Support critical applications with the bandwidth of PCIe® 4.0 connectivity
- Universal Bay Management (UBM) Ready

## Features

- Tri-Mode Storage Interface

- 12Gb/s SAS
- 6Gb/s SATA
- Gen 4.0 PCIe (NVMe)
- Hardware Secure Boot
- Universal Bay Management (UBM) ready (SFF-TA-1005)
- 13,700 MBs (256K Seq Rd)
- 3M IOPs (4K RR)
- x8 PCIe Gen 4.0 Host Interface
  - Supports x8, x4, x2, x1 PCIe lanes at a transfer rate up to 16.0 GT/s per lane, full duplex
  - Lane and polarity reversal
- SFF-9402 Compliant Connector Pin-out
- Up to 1024 SAS/SATA devices
- Up to 32 NVMe devices
- Form Factor Friendly Cable Exit

## Applications

- High-port direct attached connectivity applications
- Enterprise Databases
- Analytics Applications
- Medical Imaging
- Media Applications
- Flexible solutions for cloud computing

## Specifications

- Product: HBA 9500-8i
- Manufacturer Part #: 05-50134-01
- Lifecycle: Active
- Brackets: Full height and low profile
- Devices Supported: SAS/SATA: 1024, NVMe: 32
- Generation: 12 Gb/s
- Host Bus Type: x8 lane PCI Express 4.0

- Internal Connectors: 1 x8 SFF-8654 (SlimSAS)
- Internal Ports: 8
- I/O Controller: SAS3808
- Management Software: LSI Storage Authority (LSA), StorCLI (Command-Line Interface), HII (UEFI Human Interface Infrastructure)
- MTBF: > 5,000,000 hours at 40° C
- Operating Humidity: 20% to 80% Non-condensing
- Operating Temperature°C: 0°C to 55°C
- OS Support: Microsoft Windows, VMware vSphere/ESXi, Red Hat Enterprise Linux, SUSE Linux Enterprise Server, Ubuntu Linux, Debian Linux, Citrix XenServer, CentOS Linux, Oracle Enterprise Linux, Fedora, FreeBSD
- Physical Dimensions: Low profile 6.127" x 2.712"
- Regulatory Certifications: Australia/New Zealand (AS/NZS CISPR 22), Canada ICES-003 Class B, CE Europe (EN55022/EN55024), Europe (EN55022/EN55024), Japan (VCCI V-3), Korea (RRA no 2013-24 & 25), RoHS, Safety: EN/IEC/UL 60950, Taiwan (CNS 13438), USA (FCC 47 CFR part 15 Subpart B, class B), WEEE
- Typical Power: 5.96W
- Warranty: 3 years, free technical support, advanced replacement option at [broadcom.com/support/warranty/internal-raid-hba](https://broadcom.com/support/warranty/internal-raid-hba)
- What's in the box: 9500-8i HBA, Low Profile Bracket, FH (attached)

For more information of this Broadcom 9500-8i, please visit Broadcom website:

<https://www.broadcom.com/products/storage/host-bus-adapters/sas-nvme-9500-8i>

[Buy Now](#)