


Cablexa CAB-8643-4x8482 Datasheet

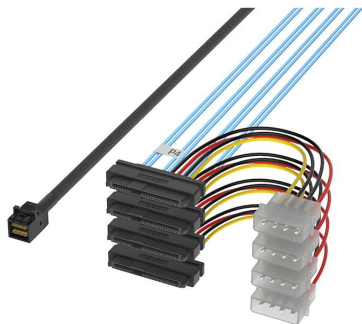

Internal HD Mini SAS SFF-8643 to 4x SAS 29P SFF-8482 with 4Pin Power

CAB-8643-4x8482

Internal HD Mini SAS SFF-8643 to 4x SAS 29P SFF-8482 with 4Pin Power

This High Density (HD) MiniSAS SFF-8643 to 4x SAS 29pin (SFF-8482) Internal cable assemblies are available for SAS 2.1, 6Gb/s and SAS 3.0, 12Gb/s specification. Like the external HD MiniSAS, this new connector uses less PCB real estate and allows higher port density for internal hosts and devices. Hybrid versions of these new cables will allow for a smooth transition from 6Gb to 12Gb.

Features

- Length = Available from 0.5~1 meter
- Wire Size (AWG) = 30
- Connector A = Internal Mini SAS HD (SFF-8643)
- Connector B = Internal 4x SAS 29pin (SFF-8482) with 4Pin Power
- Impedance = 100 Ohms
- Data Rate = 12.00 Gb/s

Applications

- Fibre Channel
- InfiniBand
- SAS 2.1 (Serial Attached SCSI) compliant
- RoHS Compliant

[Buy Now](#)